



# **Instant Payments Implementation Guidelines for ISO 20022 Interbank Messages**

**SIC IP Service**

**Individual IP Debit Stop (acmt.015) and  
Receipts (acmt.010/acmt.011)**

**Version 1.0, valid from November 2023**

## Revision history

All the changes carried out in this document are listed below with the version designation, the change date, a brief description of the change and the specification of the chapters affected.

Version	Date	Description of the change	Chapter
1.0	31.03.2023	First edition	All

*Table 1: Revision history*

Please address all suggestions, corrections, and proposed improvements to this document to:

**SIX Interbank Clearing Ltd**

Hardturmstrasse 201

CH-8005 Zurich

E-Mail: [operations.sic@six-group.com](mailto:operations.sic@six-group.com)

[www.six-group.com](http://www.six-group.com)

## General notes

SIX Interbank Clearing Ltd ("**SIC Ltd**") reserves the right to modify this document, as the need arises, at any time without prior notice.

SIC Ltd reserves all rights for this document including the rights of photomechanical reproduction, storage on electronic media and the translation into foreign languages.

Although great care has been taken in the compilation and preparation of this work to ensure accuracy, errors and omissions cannot be entirely ruled out. SIC Ltd cannot be held liable for any decision made or action taken in reliance on the information in this document or for any consequential, special or similar damages.

To improve readability, the use of masculine and feminine forms of language are avoided wherever possible. All personal designations are to be regarded as gender neutral.

If you detect any errors in this document or have any ideas or suggestions for improvements, we would be extremely grateful if you would notify these by e-mail to [operations.sic@six-group.com](mailto:operations.sic@six-group.com).

# Table of contents

<b>Revision history</b> .....	<b>2</b>
<b>General notes</b> .....	<b>3</b>
<b>Table of contents</b> .....	<b>4</b>
<b>Table of tables</b> .....	<b>5</b>
<b>Table of figures</b> .....	<b>6</b>
<b>1 Introduction</b> .....	<b>7</b>
1.1 Overview of the documentation structure .....	7
1.2 Target audience.....	7
1.3 Change control .....	7
1.4 XML schema .....	7
1.5 Reference documents .....	7
<b>2 ISO definitions</b> .....	<b>8</b>
2.1 Structure of the "acmt.015" message .....	8
2.2 Structure of the "acmt.010" message .....	9
2.3 Structure of the "acmt.011" message .....	10
<b>3 Business specifications</b> .....	<b>11</b>
3.1 Message flow .....	11
3.2 Use cases.....	12
3.3 Action types.....	12
3.4 Identification of the participating parties.....	13
3.4.1 Parties in "Account Excluded Mandate Maintenance Request" (acmt.015).....	13
3.4.2 Parties in "Account Request Acknowledgement" (acmt.010) .....	14
3.4.3 Parties in "Account Request Rejection" (acmt.011) .....	15
3.5 Use of reference information .....	16
3.5.1 References in "Account Excluded Mandate Maintenance Request" (acmt.015) .....	16
3.5.2 References in "Account Request Acknowledgement" (acmt.010).....	16
3.5.3 References in "Account Request Rejection" (acmt.011).....	17
3.6 Use of account information .....	18
3.7 Further business-related definitions .....	18
<b>4 Technical specifications</b> .....	<b>19</b>
4.1 Account Excluded Mandate Maintenance Request (acmt.015) .....	19
4.1.1 Message identification elements (Refs, A-level) .....	19
4.1.2 Message content elements (B-level).....	21
4.2 Account Request Acknowledgement (acmt.010).....	26
4.2.1 Message identification elements (Refs, A-level) .....	26
4.2.2 Message content elements (B-level).....	29
4.3 Account Request Rejection (acmt.011).....	31
4.3.1 Message identification elements (Refs, A-level) .....	31
4.3.2 Message content elements (B-level).....	34

## Table of tables

Table 1:	Revision history .....	2
Table 2:	Use case for the "acmt.015" message type.....	12
Table 3:	Action type and its code value in the "acmt.015" message .....	12
Table 4:	acmt.015 - Message identification elements (Refs, A-level).....	20
Table 5:	acmt.015 - Message content elements (B-level).....	25
Table 6:	acmt.010 - Message identification elements (Refs, A-level).....	28
Table 7:	acmt.010 - Message content elements (B-level).....	30
Table 8:	acmt.011 - Message identification elements (Refs, A-level).....	33
Table 9:	acmt.011 - Message content elements (B-level).....	35

## Table of figures

Figure 1:	Basic message structure of the "acmt.015" message .....	8
Figure 2:	Basic message structure of the "acmt.010" message .....	9
Figure 3:	Basic message structure of the "acmt.011" message .....	10
Figure 4:	Message flow for Individual IP Debit Stop .....	11
Figure 5:	Entering the action type in the "acmt.015" message .....	12
Figure 6:	Parties in the "acmt.015" message (Account Servicer Identification) .....	13
Figure 7:	Parties in the "acmt.010" message (Organisation Identification / Account Servicer Identification) .....	14
Figure 8:	Parties in the "acmt.011" message (Organisation Identification / Account Servicer Identification) .....	15
Figure 9:	Message identification in the "acmt.015" message (Message Identification) .....	16
Figure 10:	Message identification in the "acmt.010" message (Message Identification / Acknowledged Message Identification).....	16
Figure 11:	Message identification in the "acmt.011" message (Message Identification / Rejected Request Identification).....	17
Figure 12:	Entering the IP settlement account in the "acmt.015" message (Account).....	18
Figure 13:	Message identification elements (Refs) "acmt.015".....	19
Figure 14:	Message content elements "acmt.015" .....	21
Figure 15:	Example of entering the "Organisation" in the "acmt.015" message .....	22
Figure 16:	Message identification elements (Refs) "acmt.010".....	26
Figure 17:	Message content elements "acmt.010" .....	29
Figure 18:	Message identification elements (Refs) "acmt.011" .....	31
Figure 19:	Message content elements "acmt.011" .....	34

# 1 Introduction

## 1.1 Overview of the documentation structure

The Instant Payments Implementation Guidelines (IG) consist of several module documents – this document for the message types "acmt.015", "acmt.010" and "acmt.011" – with message-specific information, including information on the application-specific handling of individual elements. They specify the messages to be submitted to and delivered from the SIC IP service in the ISO 20022 message standard.

This Implementation Guideline is part of the specifications required for the operation of the SIC IP service and describes the use of the ISO 20022 messages "acmt.015", "acmt.010" and "acmt.011" for the start of the SIC IP service as of November 2023.

## 1.2 Target audience

The "Instant Payments Implementation Guidelines for ISO 20022 Interbank Messages" are addressed to all participants of the SIC IP service.

## 1.3 Change control

All modifications made to this document are listed in the change history (Table 1) showing the version, the date of the change, a brief description and references to the chapters concerned.

## 1.4 XML schema

The XML schema for messages "acmt.015", "acmt.010" and "acmt.011" for the SIC IP service are identical to those for the SIC RTGS service, and are published on the [www.iso-payments.ch](http://www.iso-payments.ch) website:

- *acmt.015.001.03.ch.01.xsd*
- *acmt.010.001.03.ch.01.xsd*
- *acmt.011.001.03.ch.01.xsd*

They should preferably be opened using for-purpose XML software.

## 1.5 Reference documents

Information about participation in and the functionality of the SIC IP service can be found in the "**SIC IP Service Handbook**".

## 2 ISO definitions

The "Account Excluded Mandate Maintenance Request" (acmt.015) message is sent from the participant to the SIC IP service to trigger an individual debit stop on its IP settlement account. It is based on the ISO 20022 XML schema "acmt.015.001.03".

The "Account Request Acknowledgement" (acmt.010) and "Account Request Rejection" (acmt.011) messages are used by the SIC IP service as acknowledgements (OK or NOK) to the acmt.015 message that was sent from the participant. In the positive case, the SIC IP service confirms the execution of the action with an acmt.010 message, and in the negative case it informs about rejection of the action with an acmt.011 message. The acknowledgement messages are based on the ISO 20022 XML schemas "acmt.010.001.03" and "acmt.011.001.03" respectively.

### 2.1 Structure of the "acmt.015" message



The "acmt.015" message is essentially structured as follows:


**A-level:** Element «References»: This block must occur exactly once and contains the identification elements of the message.

**B-level:** The B-level contains further information that is mandatory for the execution of the individual IP debit stop and consists of the following elements:

- "Account": This block must occur exactly once and contains the account information and the action to be executed in the SIC IP service.
- "Account Servicer Identification": This block must occur exactly once and contains the identification of the participant.
- "Organisation": This block must occur exactly once but is ignored in the SIC IP service and may contain pseudo values in the mandatory sub-elements.
- "Additional Message Information": This block can occur once according to the ISO definition. The block is not currently used by the SIC IP service but is left in the schema for possible future use.
- The following blocks can optionally occur in the ISO definition, but are not used in the SIC IP service and are therefore not permitted:
  - "From"
  - "Contact Dates"
  - "Underlying Master Agreement"
  - "Digital Signature"

Figure 1: Basic message structure of the "acmt.015" message

## 2.2 Structure of the "acmt.010" message

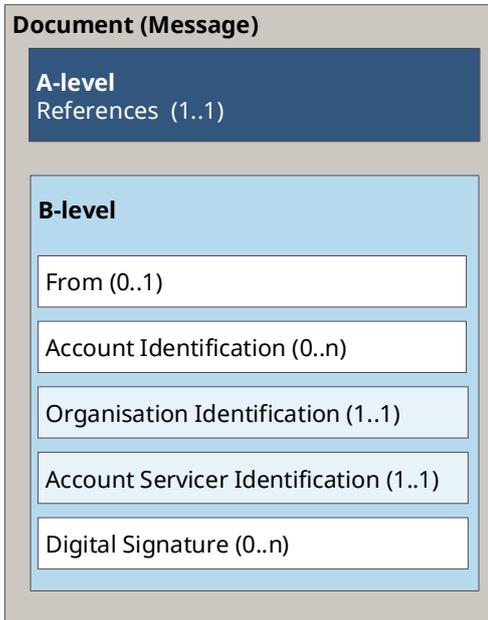

The "acmt.010" message is essentially structured as follows:


**A-Level:** Element "*References*": This block must occur exactly once and contains the identification elements of the response message and the identification elements of the original message acmt.015.

**B-Level:** The B-level contains the following elements:

- "*Organisation Identification*": This block must occur exactly once and contains the identification of SIC Ltd as the sender of the OK acknowledgement.
- "*Account Servicer Identification*": This block must occur exactly once and contains the identification of the participant as the recipient of the OK acknowledgement.
- The following blocks can optionally occur in the ISO definition, but are not used in the SIC IP service and are therefore not permitted:
  - "*From*"
  - "*Account Identification*"
  - "*Digital Signature*"

Figure 2: Basic message structure of the "acmt.010" message

## 2.3 Structure of the "acmt.011" message

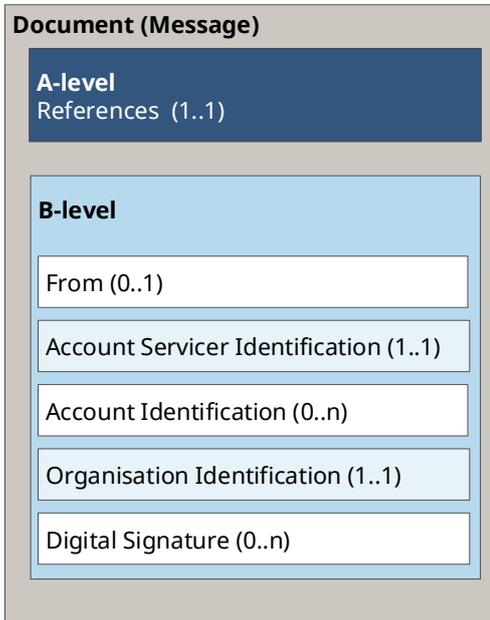

The "acmt.011" message is essentially structured as follows:

**A-Level:** Element «*References*»: This block must occur exactly once and contains the identification elements of the response message, the identification elements of the original message acmt.015, and the reason for the rejection.

**B-Level:** The B-level contains the following elements:

- «*Account Servicer Identification*»: This block must occur exactly once and contains the identification of the participant as the recipient of the NOK acknowledgement.
- «*Organisation Identification*»: This block must occur exactly once and contains the identification of SIC Ltd as the sender of the NOK acknowledgement.
- The following blocks can optionally occur in the ISO definition, but are not used in the SIC IP service and are therefore not permitted:
  - "From"
  - "Account Identification"
  - "Digital Signature"

Figure 3: Basic message structure of the "acmt.011" message

## 3 Business specifications

### 3.1 Message flow

An "acmt.015" message is transmitted by the participant to the SIC IP service, who validates the message and then either

- responds positively with an "acmt.010" message (OK acknowledgement) or
- responds negatively with an "acmt.011" message (NOK acknowledgement).

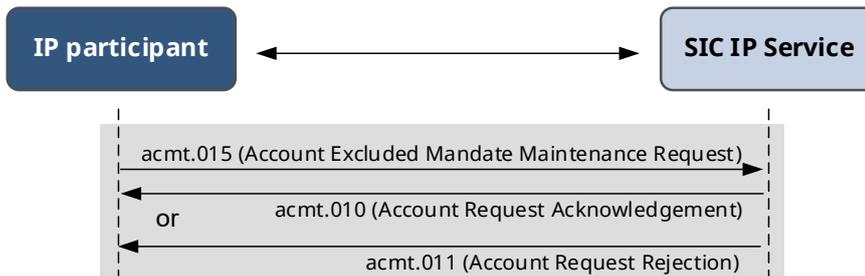


Figure 4: Message flow for Individual IP Debit Stop

In contrast to other similar OK acknowledgements, the "acmt.010" message used in the positive case confirms not only the correctness of the submitted message but also the execution of the instructed action. For this reason, the code value "COMP" (completed) is always returned in the `.../Refs/Sts` element.

The "acmt.011" message used in the negative case informs about the rejection of an instructed action, but in contrast to other similar NOK acknowledgements, it does not contain an explicit status indication. A 3-digit proprietary rejection reason is provided in the `.../Refs/RjctnRsn` element (error codes according to the "SIC IP Service Handbook").

### 3.2 Use cases

The "Account Excluded Mandate Maintenance Request" message (acmt.015) is used for the following use case in the SIC IP service:

Use case	Input/Output	ISO 2022
Individual IP debit stop	I	acmt.015

Table 2: Use case for the "acmt.015" message type

### 3.3 Action types

The following action type is available:

Code	Action type
IDBS	Individual IP Debit Stop

Table 3: Action type and its code value in the "acmt.015" message

To enable correct, type-specific definition and validation, the corresponding code value is entered in the `.../Acct/Rstrctn/RstrctnTp/Cd` element.

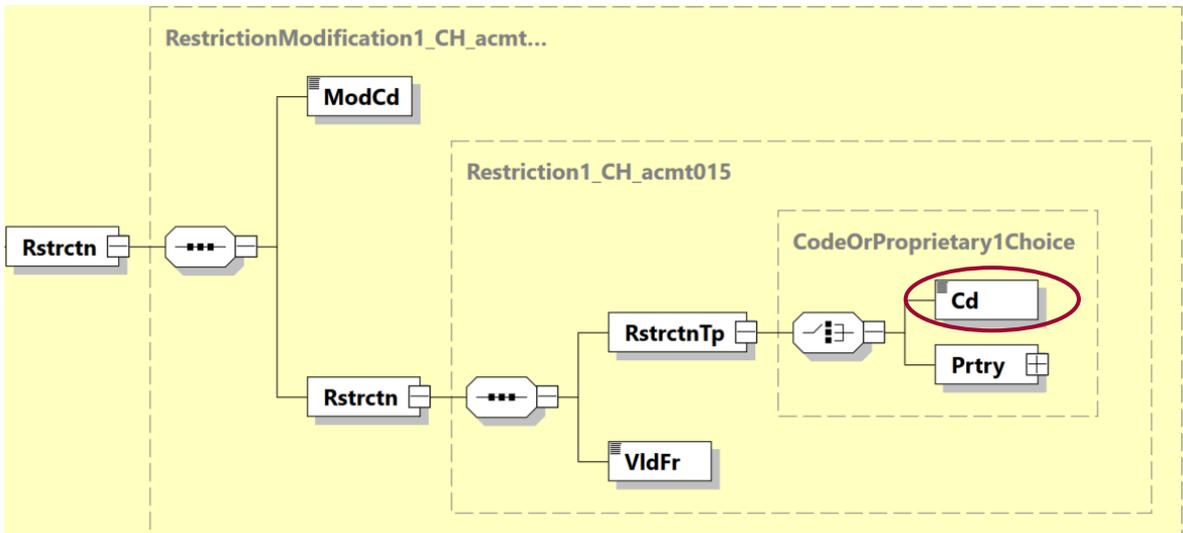


Figure 5: Entering the action type in the "acmt.015" message

### 3.4 Identification of the participating parties

#### 3.4.1 Parties in "Account Excluded Mandate Maintenance Request" (acmt.015)

In the "acmt.015" message, the participant is specified as the initiator of the action in the SIC IP service in the B-level of the message.

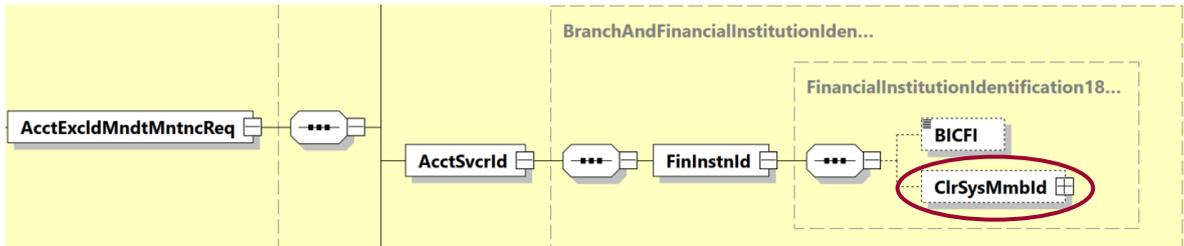


Figure 6: Parties in the "acmt.015" message (Account Servicer Identification)

The participant is identified in the SIC IP service exclusively via the SIC IID.

The SIC IID is a 6-digit numerical value, i.e. only digits 0–9, and is entered for the participant under "Account Servicer Identification" in the `.../FinInstnId/ClrSysMmbId/MmbId` element.

### 3.4.2 Parties in "Account Request Acknowledgement" (acmt.010)

In the "acmt.010" message, both SIC Ltd (as sender of the OK acknowledgement) and the participant (as initiator of the original action) are specified in the B-level of the message in the SIC IP service.

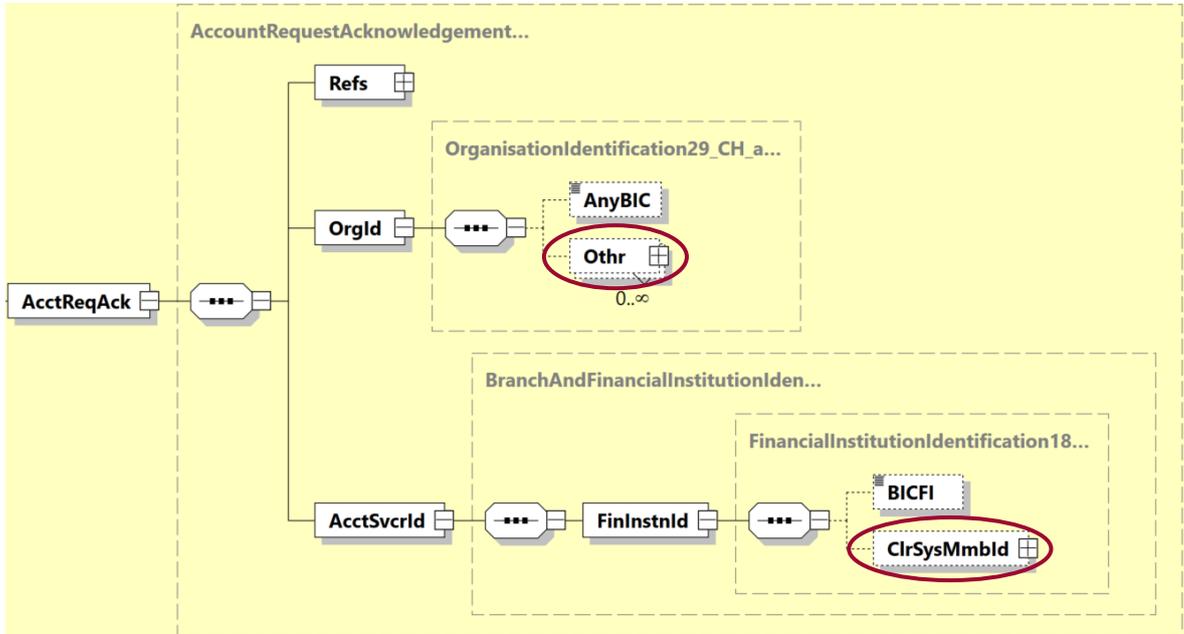


Figure 7: Parties in the "acmt.010" message (Organisation Identification / Account Servicer Identification)

Parties in the SIC IP service are identified exclusively via the SIC IID.

The SIC IID is a 6-digit numerical value, i.e. only digits 0-9, and SIC IIDs are provided for:

- SIC Ltd under "Organisation Identification" in the .../Othr/Id element and
- the participant under "Account Servicer Identification" in the .../FinInstnId/ClrSysMmbId/MmbId element.

### 3.4.3 Parties in "Account Request Rejection" (acmt.011)

In the "acmt.011" message, SIC Ltd (as sender of the NOK acknowledgement) and the participant (as initiator of the original action) are specified in the B-level of the message in the SIC IP service.

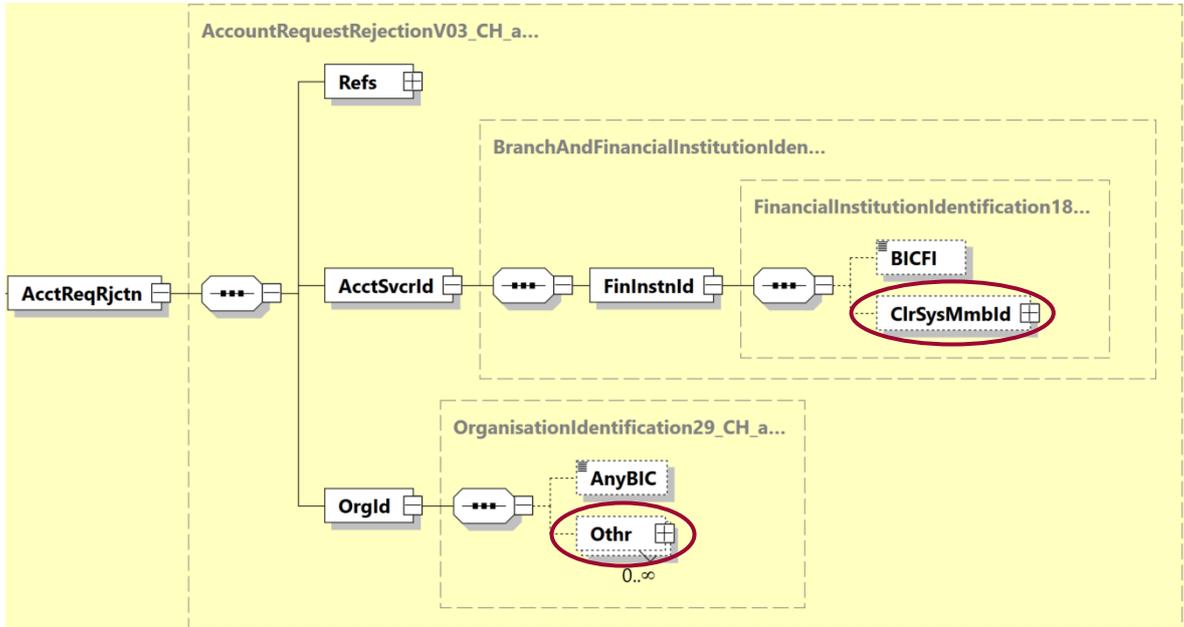


Figure 8: Parties in the "acmt.011" message (Organisation Identification / Account Servicer Identification)

Parties in the SIC IP service are identified exclusively via the SIC IID.

The SIC IID is a 6-digit numerical value, i.e. only digits 0–9, and SIC IIDs are provided for:

- SIC Ltd under "Organisation Identification" in the *.../Othr/Id* element and
- the participant under "Account Servicer Identification" in the *.../FinInstnId/ClrSysMmbId/MmbId* element.

### 3.5 Use of reference information

#### 3.5.1 References in "Account Excluded Mandate Maintenance Request" (acmt.015)

In the "acmt.015" message, the `.../Refs/MsgId/Id` reference is included by the participant in the A-level as a unique message identification.

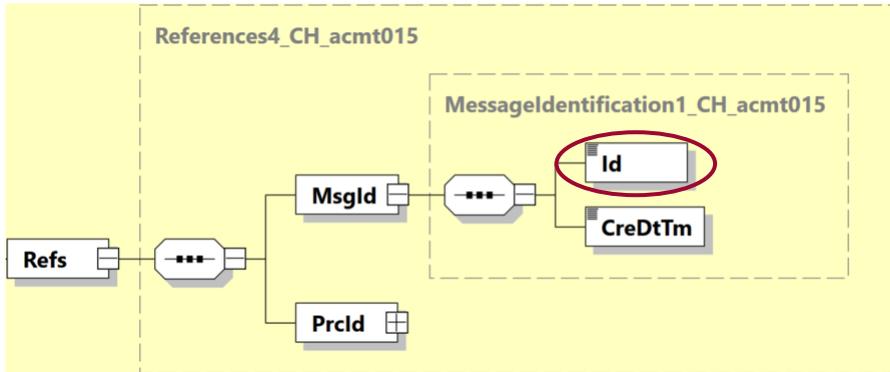


Figure 9: Message identification in the "acmt.015" message (Message Identification)

#### 3.5.2 References in "Account Request Acknowledgement" (acmt.010)

In the "acmt.010" message, the following references are included by the SIC IP service in the A-level:

- `.../Refs/MsgId/Id`: unique message identification of the "acmt.010" message
- `.../Refs/AckdMsgId/Id`: the message identification of the original "acmt.015" message

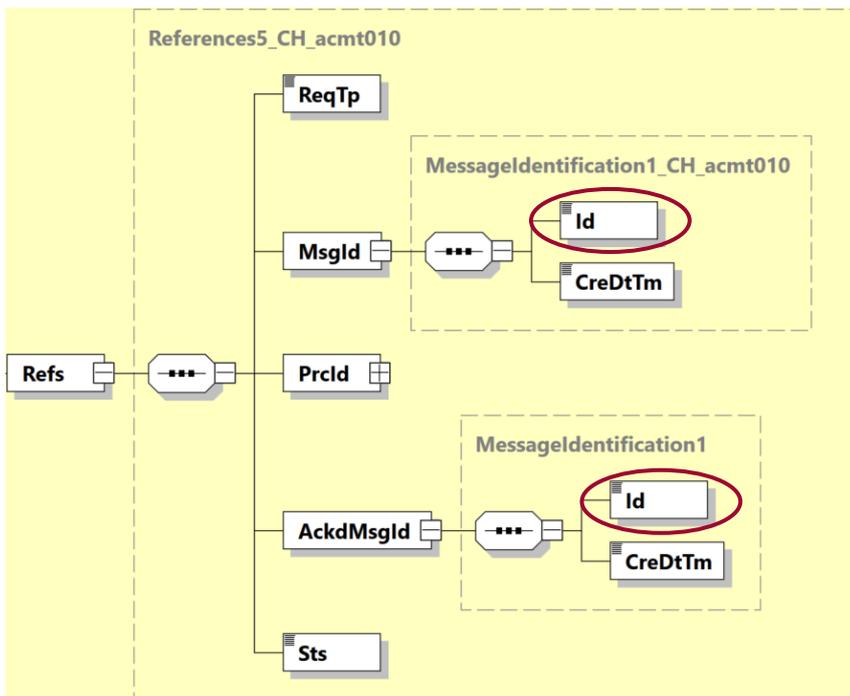


Figure 10: Message identification in the "acmt.010" message (Message Identification / Acknowledged Message Identification)

### 3.5.3 References in "Account Request Rejection" (acmt.011)

In the "acmt.011" message, the following references are included by the SIC IP service in the A-level:

- `.../Refs/MsgId/Id`: unique message identification of the "acmt.011" message
- `.../Refs/RjctdReqId/Id`: message identification of the original "acmt.015" message

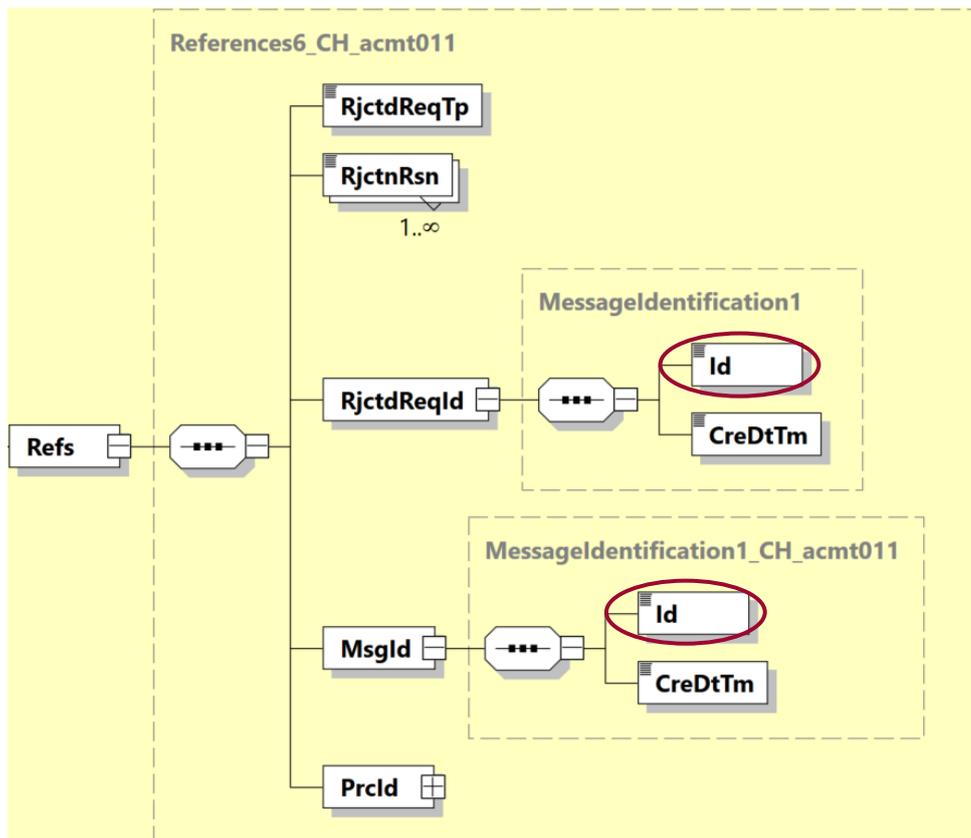


Figure 11: Message identification in the "acmt.011" message (Message Identification / Rejected Request Identification)

### 3.6 Use of account information

In the B-level of the "acmt.015" message, the IP settlement account of the participant on which the action is to be executed must be specified in the `.../Acct/Id/Othr/Id` element.

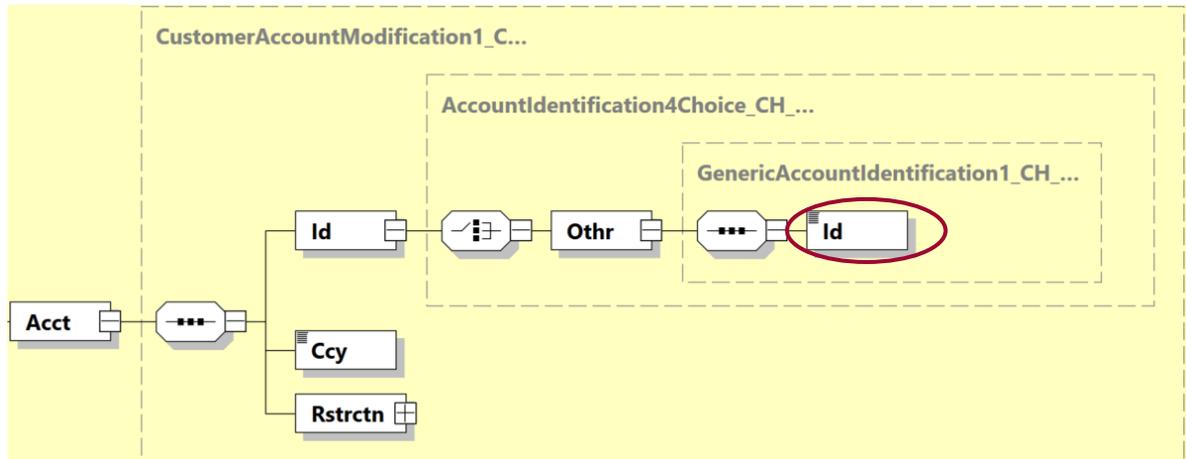


Figure 12: Entering the IP settlement account in the "acmt.015" message (Account)

### 3.7 Further business-related definitions

Information on the ISO 20022 Implementation Guidelines of the SIC RTGS service as applicable to SIC/euroSIC, which underlie those of the SIC IP service, is published on the [www.iso-payments.ch](http://www.iso-payments.ch) website. The messages used for the launch of the SIC IP service as of November 2023 are based on the SIC/euroSIC Implementation Guidelines as of SIC platform release 4.10 from 17 November 2023.

## 4 Technical specifications

### 4.1 Account Excluded Mandate Maintenance Request (acmt.015)

#### 4.1.1 Message identification elements (Refs, A-level)

The "References" block (A-level of the message) occurs exactly once in the message and contains the following elements:

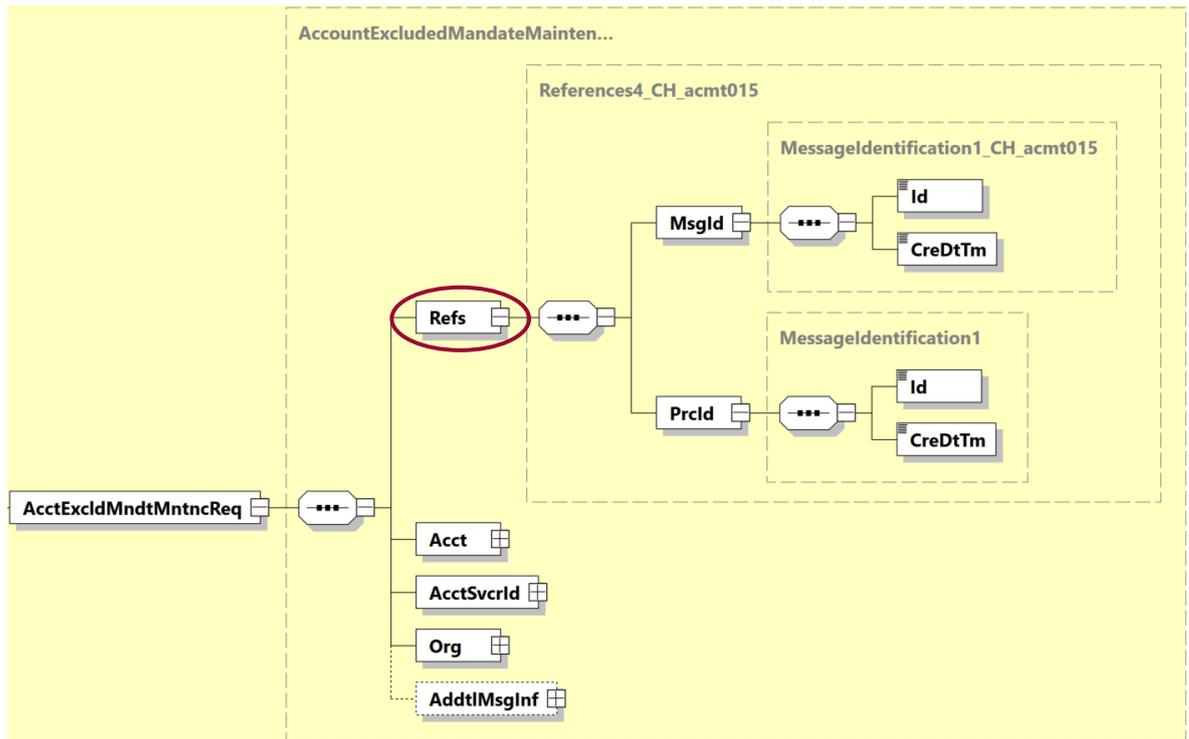


Figure 13: Message identification elements (Refs) "acmt.015"

The following table specifies all the elements of the "References" block of the "acmt.015" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Account Excluded Mandate Maintenance Request V03	AcctExclMndtMntncReq	1..1	1..1	
References	Refs	1..1	1..1	
References +Message Identification	MsgId	1..1	1..1	
References +Message Identification ++Identification	Id	1..1	1..1	<b>Message Identification</b> Only the restricted character set excluding spaces is permitted for this element.
References +Message Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Creation Date Time</b> The SIC IP service accepts two forms of representation of a time: 1. UTC time format (YYYY-MM-DDThh:mm:ss.sssZ) 2. Local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm)
References +Process Identification	PrcId	1..1	1..1	
References +Process Identification ++Identification	Id	1..1	1..1	<b>Clearing System Identification (proprietary)</b> Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP must be used
References +Process Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Creation Date Time</b> The element is ignored by the SIC IP service, but must be populated to comply with ISO 20022 schema definitions. Recommendation: Repeat content from element ../MsgId/CreDtTm (will not be validated by the SIC IP service).

Table 4: acmt.015 - Message identification elements (Refs, A-level)

### 4.1.2 Message content elements (B-level)

The B-level of the message contains the following elements:

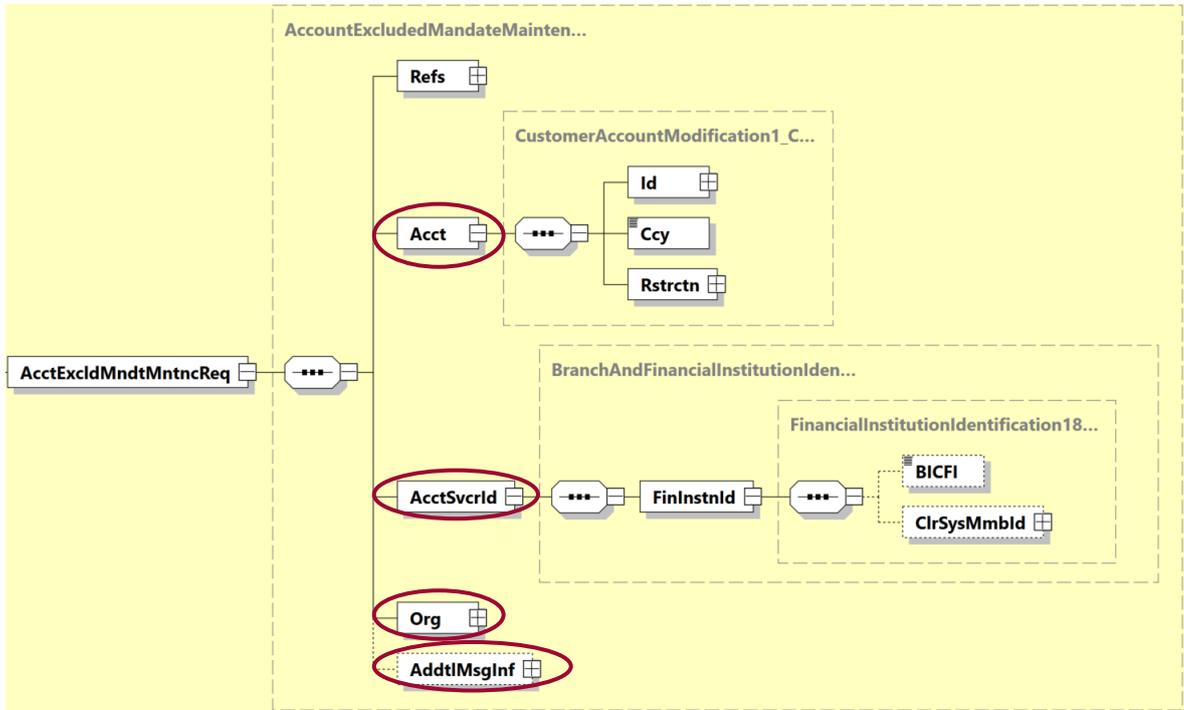


Figure 14: Message content elements "acmt.015"

Details of these elements are listed below:

- "Account": Contains the account information and the action to be performed in the SIC IP service.
- "Account Servicer Identification": Contains the identification of the participant.
- "Organisation": Must be present but is ignored in the SIC IP service and may contain pseudo values in the mandatory sub-elements (see note below).
- "Additional Message Information": The block is not currently used by the SIC IP service but is left in the schema for possible future use.

The table below specifies all elements of the B-level of the "acmt.015" message that are relevant for the SIC IP service.

**Note about the "Organisation"**

The entire <Org> block is ignored by the SIC IP service but must be populated to comply with the ISO 20022 schema definitions. To comply with these definitions, it is recommended to provide this block according to the following example:

```
<Org>
|
| <FullLglNm>
| | <FullLglNm>AAA</FullLglNm>
| </FullLglNm>
| <CtryOfOpr>CH</CtryOfOpr>
| <LglAdr>
| | <Adr/>
| </LglAdr>
| <OrgId/>
</Org>
```

Figure 15: Example of entering the "Organisation" in the "acmt.015" message

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account	Acct	1..1	1..1	
Account +Identification	Id	1..n	1..1	<b>Settlement Account Information</b>
Account +Identification ++Other	Othr	1..1	1..1	<b>Identification of Settlement Account (proprietary)</b>
Account +Identification ++Other +++Identification	Id	1..1	1..1	<b>Account Number (proprietary)</b> Must contain the account number of an active IP settlement account (format =6n).
Account +Currency	Ccy	1..1	1..1	<b>Currency Code</b> Only CHF permitted.
Account +Restriction	Rstrctn	0..n	1..1	
Account +Restriction ++Modification Code	ModCd	0..1	1..1	<b>Modification Code</b> Must contain the value "MODI" (Modification).
Account +Restriction ++Restriction	Rstrctn	1..1	1..1	
Account +Restriction ++Restriction +++Restriction Type	RstrctnTp	1..1	1..1	<b>Steering Action Type</b>
Account +Restriction ++Restriction +++Restriction Type ++++Code	Cd   {Or	1..1	1..1	<b>Steering Action Type (code)</b> Must be used. Identification of the action type, the following code value for action type is available: IDBS = Individual IP Debit Stop

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments		
Message Item	XML Tag	Mult	Mult	Definition	
Account +Restriction ++Restriction +++Restriction Type ++++Proprietary	Prtry  Or}	1..1	1..1	<b>Steering Action Type (proprietary)</b> Is currently not yet supported by SIC IP service (retained in message definition for possible future use).	
Account +Restriction ++Restriction +++Valid From	VldFr	1..1	1..1	<b>Valid from</b> The SIC IP service does not support actions to be executed at a desired time, all actions are executed immediately upon receipt of the message. The element is ignored by the SIC IP service, but must be populated to comply with ISO 20022 schema definitions. Recommendation: Repeat content from element .../MsgId/CreDtTm (will not be validated by the SIC IP service).	
Account Servicer Identification	AcctSvcrId	1..1	1..1	<b>Identification of the Participant</b> Identifies the initiating participant. Required for authorization checking.	
Account Servicer Identification +Financial Institution Identification	FinInstnId	1..1	1..1	<b>Financial Institution Identification</b>	
Account Servicer Identification +Financial Institution Identification ++BICFI	BICFI	0..1	0..1	<b>Identification of the Participant (BIC)</b> Must not be used.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification	ClrSysMmbId	0..1	0..1	<b>Identification of the Participant (proprietary)</b> Must be used. Must contain a valid identification of an active participant. Must not be concatenated.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification +++Member Identification	MmbId	1..1	1..1	<b>Member Identification</b> SIC IID (=6n), must be contained in the bank master data and active.	
Organisation	Org	1..1	1..1	The <Org> block is ignored by the SIC IP service, but must be populated to comply with ISO 20022 schema definitions (see the following recommendations for supplying pseudo values in the mandatory sub-elements).	
Organisation +Full Legal Name	FullLglNm	1..1	1..1		
Organisation +Full Legal Name ++Full Legal Name	FullLglNm	1..1	1..1	The element is ignored by the SIC IP service and can be filled with a pseudo value. Recommended pseudo value = "AAA"	

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Organisation +Country Of Operation	CtryOfOpr	1..1	1..1	The element is ignored by the SIC IP service and can be filled with a pseudo value. Recommended pseudo value = "CH"
Organisation +Legal Address	LglAdr	1..1	1..1	
Organisation +Legal Address ++Address	Adr	1..1	1..1	The element is ignored by the SIC IP service and can either be filled with pseudo values or supplied empty. Recommendation: deliver as an empty element tag <Adr/>
Organisation +Organisation Identification	OrgId	1..1	1..1	The element is ignored by the SIC IP service and can either be filled with pseudo values or supplied empty. Recommendation: deliver as an empty element tag <OrgId/>
Additional Message Information	AddtMsgInf	0..1	0..1	Is currently not yet supported by SIC IP service (retained in message definition for possible future use).

Table 5: acmt.015 - Message content elements (B-level)

## 4.2 Account Request Acknowledgement (acmt.010)

### 4.2.1 Message identification elements (Refs, A-level)

The "References" block (A-level of the message) occurs exactly once in the message and contains the following elements:

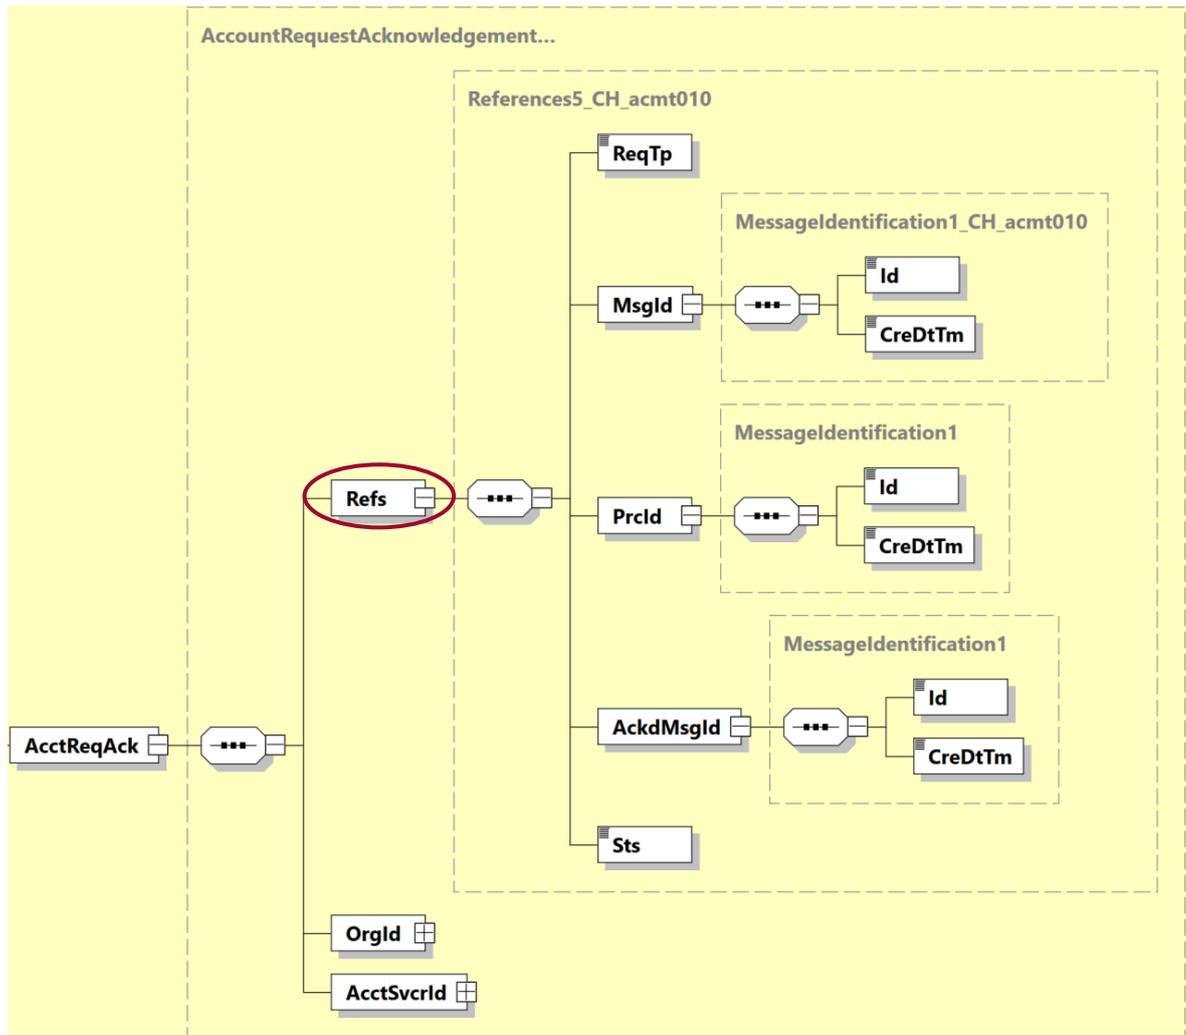


Figure 16: Message identification elements (Refs) "acmt.010"

The following table specifies all the elements of the "References" block of the "acmt.010" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Account Request Acknowledgement V03	AcctReqAck	1..1	1..1	
References	Refs	1..1	1..1	
References +Request Type	ReqTp	1..1	1..1	Always contains the value "MNTN" (Maintenance).
References +Message Identification	MsgId	1..1	1..1	
References +Message Identification ++Identification	Id	1..1	1..1	<b>Message Identification</b> Only the restricted character set excluding spaces is permitted for this element.
References +Message Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Creation Date Time</b> Always Local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm) is used.
References +Process Identification	PrcId	1..1	1..1	
References +Process Identification ++Identification	Id	1..1	1..1	<b>Clearing System Identification (proprietary)</b> Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP is used
References +Process Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Creation Date Time</b> Always Local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm) is used.
References +Acknowledged Message Identification	AckdMsgId	0..n	1..1	
References +Acknowledged Message Identification ++Identification	Id	1..1	1..1	<b>Original Message Identification</b> Message identification of the confirmed acmt.015 message.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
References +Acknowledged Message Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Original Creation Date Time</b> Creation Date Time of the confirmed acmt.015 message.
References +Status	Sts	0..1	1..1	<b>Status</b> Always contains the value "COMP" (Completed).

Table 6: acmt.010 - Message identification elements (Refs, A-level)

### 4.2.2 Message content elements (B-level)

The B-level of the message contains the following elements:

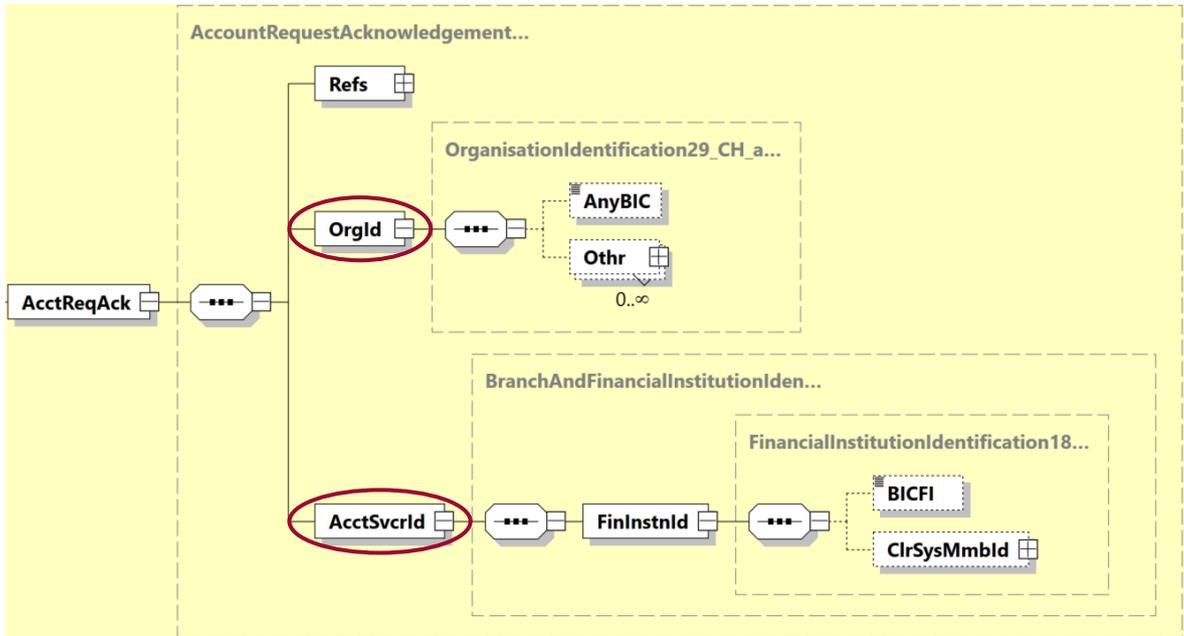


Figure 17: Message content elements "acmt.010"

Details of these elements are listed below:

- "Organisation Identification": Contains the identification of SIC Ltd as the sender of the OK acknowledgement.
- "Account Servicer Identification": Contains the identification of the participant as the receiver or the OK acknowledgement.

The table below specifies all elements of the B-level of the "acmt.010" message that are relevant for the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments		
Message Item	XML Tag	Mult	Mult	Definition	
Organisation Identification	OrgId	1..1	1..1	<b>Identification of SIC Ltd</b> Sender of the OK acknowledgement	
Organisation Identification +Any BIC	AnyBIC	0..1	0..1	<b>Any BIC (Business Identifier Code)</b> Not used.	
Organisation Identification +Other	Othr	0..n	0..n	<b>Other Organisation Identification</b> Always used.	
Organisation Identification +Other ++Identification	Id	1..1	1..1	<b>Member Identification</b> SIC IID of SIC Ltd (= 099990)	
Account Servicer Identification	AcctSvcrId	1..1	1..1	<b>Identification of the Participant</b> Originator of the action from element <AcctSvcrId> of the confirmed acmt.015 message.	
Account Servicer Identification +Financial Institution Identification	FinInstnId	1..1	1..1	<b>Financial Institution Identification</b>	
Account Servicer Identification +Financial Institution Identification ++BICFI	BICFI	0..1	0..1	<b>Identification of the Participant (BIC)</b> Not used.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification	ClrSysMmbId	0..1	0..1	<b>Identification of the Participant (proprietary)</b> Always used.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification +++Member Identification	MmbId	1..1	1..1	<b>Member Identification</b> SIC IID (=6n)	

Table 7: acmt.010 - Message content elements (B-level)

### 4.3 Account Request Rejection (acmt.011)

#### 4.3.1 Message identification elements (Refs, A-level)

The "References" block (A-level of the message) occurs exactly once in the message and contains the following elements:

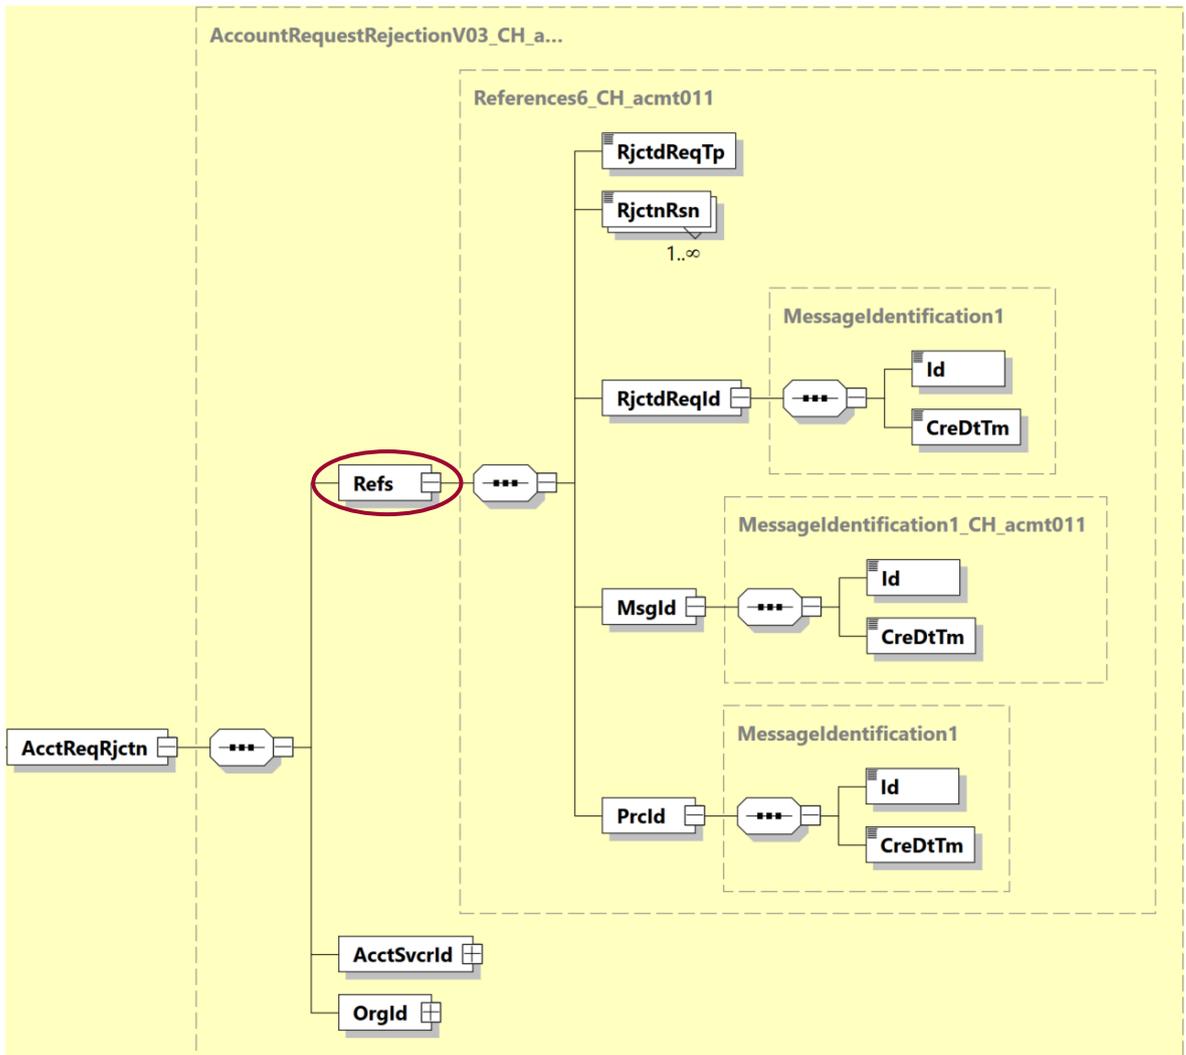


Figure 18: Message identification elements (Refs) "acmt.011"

The following table specifies all the elements of the "References" block of the "acmt.011" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Account Request Rejection V03	AcctReqRjctn	1..1	1..1	
References	Refs	1..1	1..1	
References +Rejected Request Type	RjctdReqTp	1..1	1..1	Always contains the value "MNTN" (Maintenance).
References +Rejection Reason	RjctnRsn	1..n	1..n	<p><b>Rejection Reason / Erroneous Element</b>            Contains the following information:            a) Proprietary 3-digit SIC error code (error codes in accordance with the SIC IP Service Handbook)            b) Location of the erroneous element as an XPath            The 3-digit error code is always supplied first, followed by the XPath, separated by space.</p> <p>One &lt;RjctnRsn&gt; element will be provided by the SIC IP service for each error that was identified. If the error cannot be unambiguously assigned to one element, the value "n/a" will be provided instead of an XPath.</p>
References +Rejected Request Identification	RjctdReqId	1..1	1..1	
References +Rejected Request Identification ++Identification	Id	1..1	1..1	<p><b>Original Message Identification</b>            Message identification of the rejected acmt.015 message.            If the message identification is not available, the value UNKNOWN is supplied.</p>
References +Rejected Request Identification ++Creation Date Time	CreDtTm	1..1	1..1	<p><b>Original Creation Date Time</b>            Creation Date Time of the confirmed acmt.015 message.            If the Creation Date Time is not available, the value 1900-01-01T00:00:00.000Z is supplied.</p>
References +Message Identification	MsgId	1..1	1..1	
References +Message Identification ++Identification	Id	1..1	1..1	<p><b>Message Identification</b>            Only the restricted character set excluding spaces is permitted for this element.</p>
References +Message Identification ++Creation Date Time	CreDtTm	1..1	1..1	<p><b>Creation Date Time</b>            Always Local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm) is used.</p>
References +Process Identification	PrcId	1..1	1..1	

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
References +Process Identification ++Identification	Id	1..1	1..1	<b>Clearing System Identification (proprietary)</b> Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP is used
References +Process Identification ++Creation Date Time	CreDtTm	1..1	1..1	<b>Creation Date Time</b> Always Local time with UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm) is used.

Table 8: acmt.011 - Message identification elements (Refs, A-level)

### 4.3.2 Message content elements (B-level)

The B-level of the message contains the following elements:

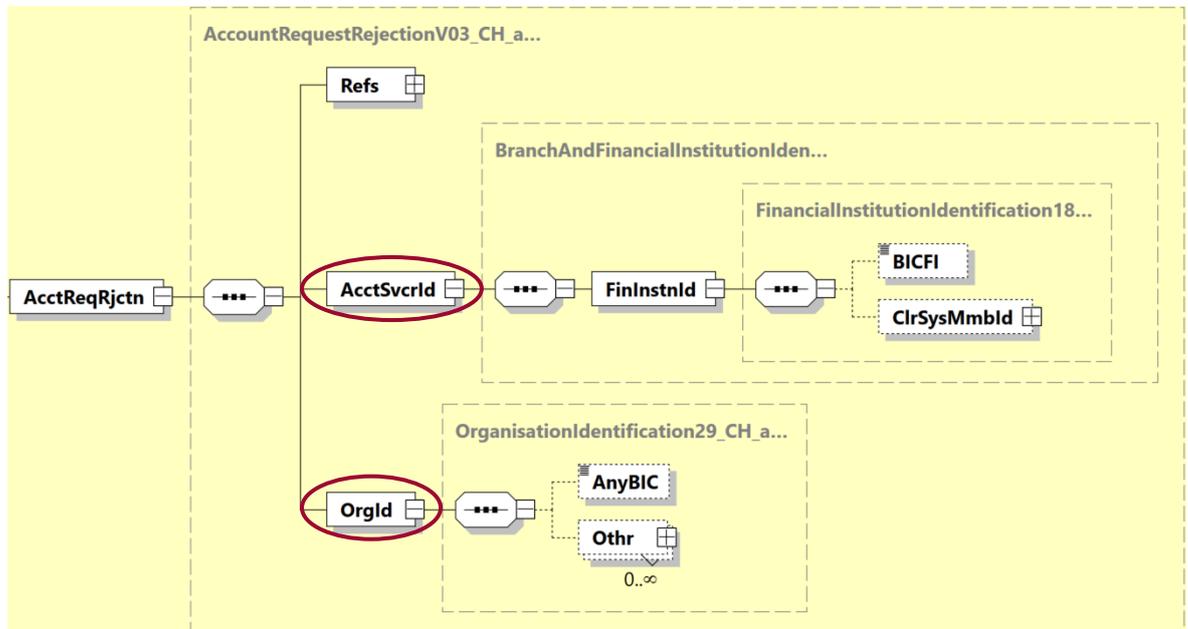


Figure 19: Message content elements "acmt.011"

Details of these elements are listed below:

- "Account Servicer Identification": Contains the identification of the participant as the receiver of the NOK acknowledgement.
- "Organisation Identification": Contains the identification of SIC Ltd as the sender of the NOK acknowledgement.

The table below specifies all elements of the B-level of the "acmt.011" message that are relevant for the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments		
Message Item	XML Tag	Mult	Mult	Definition	
Account Servicer Identification	AcctSvcrId	1..1	1..1	<b>Identification of the Participant</b> Originator of the action from element <AcctSvcrId> of the rejected acmt.015 message.	
Account Servicer Identification +Financial Institution Identification	FinInstnId	1..1	1..1	<b>Financial Institution Identification</b>	
Account Servicer Identification +Financial Institution Identification ++BICFI	BICFI	0..1	0..1	<b>Identification of the Participant (BIC)</b> Not used.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification	ClrSysMmbId	0..1	0..1	<b>Identification of the Participant (proprietary)</b> Always used.	
Account Servicer Identification +Financial Institution Identification ++Clearing System Member Identification +++Member Identification	MmbId	1..1	1..1	<b>Member Identification</b> SIC IID (=6n)	
Organisation Identification	OrgId	1..1	1..1	<b>Identification of SIC Ltd</b> Sender of the NOK acknowledgement	
Organisation Identification +Any BIC	AnyBIC	0..1	0..1	<b>Any BIC (Business Identifier Code)</b> Not used.	
Organisation Identification +Other	Othr	0..n	0..n	<b>Other Organisation Identification</b> Always used.	
Organisation Identification +Other ++Identification	Id	1..1	1..1	<b>Member Identification</b> SIC IID of SIC Ltd (= 099990)	

Table 9: acmt.011 - Message content elements (B-level)